



PROFILE 140



PROFILE 140

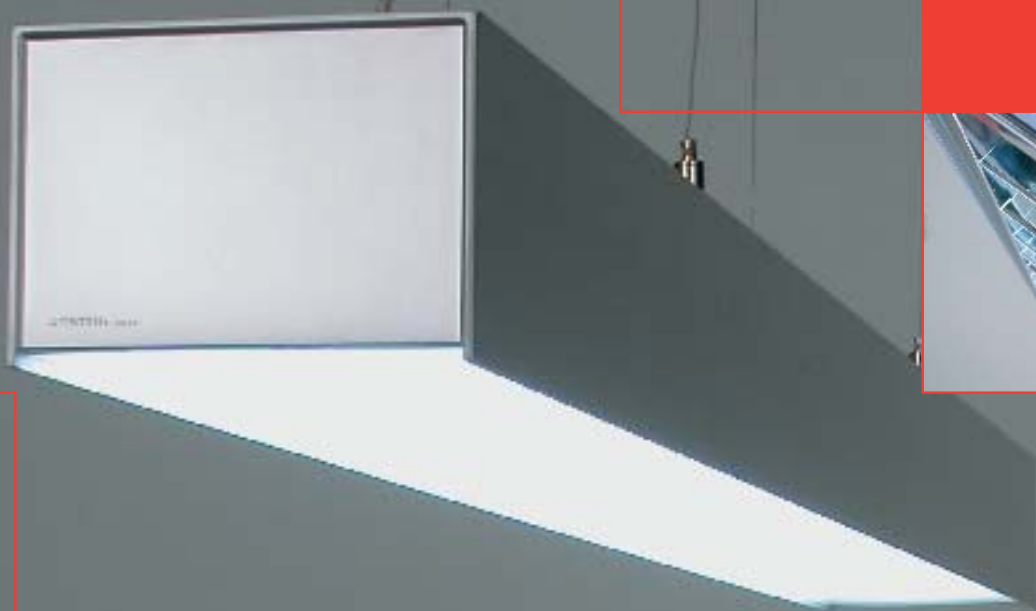


2594-50-39 - P
2x39W




2594-51-39 - P
2x39W




2594-50-54 - P
2x54W




2594-51-54 - P
2x54W




2594-50-80 - P
2x80W




2594-51-80 - P
2x80W





2594-60-39 - P
2 x T5 39W
2x QR-111 MAX. 50W




2594-61-39 - P
2 x T5 39W
2x QR-111 MAX. 50W



2594-70-39 - P
2 x T5 39W
2x SPOT MAX. 50W



2594-71-39 - P
2 x T5 39W
2x SPOT MAX. 50W




FOCOS JACK
NO INCLUIDOS
(VER PÁG. 23)

JACK SPOTS
NOT INCLUDED
(SEE PAG. 23)


PROFILE 140




2594-42-39 - P
4x39W





2594-52-39 - P
4x39W




2594-52-54 - P
4x54W




2594-62-54 - P
4x54W




2594-70-54 - P
2 x T5 54W
2x QR-111 MAX. 50W





2594-71-54 - P
2 x T5 54W
2x QR-111 MAX. 50W




2594-82-39 - P
4 x T5 39W
2x QR-111 MAX. 50W




2594-92-39 - P
4 x T5 39W
2x QR-111 MAX. 50W



2594-80-54 - P
2 x T5 54W
2x SPOT MAX. 50W




2594-81-54 - P
2 x T5 54W
2x SPOT MAX. 50W




FOCOS JACK
NO INCLUIDOS
(VER PÁG. 23)

JACK SPOTS
NOT INCLUDED
(SEE PAG. 23)



2594-62-39 - P
4 x T5 39W
2x SPOT MAX. 50W



2594-72-39 - P
4 x T5 39W
2x SPOT MAX. 50W




PROFILE 140 recessed




2594-55-39 - P
2x39W 150x943



2594-56-39 - P
2x39W 150x943




2594-55-54 - P
2x54W 150x1243



2594-56-54 - P
2x54W 150x1243




2594-55-80 - P
2x80W 150x1543



2594-56-80 - P
2x80W 150x1543



2594-65-39 - P
2 x T5 39W
2x QR-111 MAX. 50W 150x1543




2594-66-39 - P
2 x T5 39W
2x QR-111 MAX. 50W 150x1543




FOCOS JACK
NO INCLUIDOS
(VER PAG. 23)

JACK SPOTS
NOT INCLUDED
(SEE PAG. 23)



2594-75-39 - P
2 x T5 39W
2x SPOT MAX. 50W 150x1543




2594-76-39 - P
2 x T5 39W
2x SPOT MAX. 50W 150x1543




PROFILE 140 recessed




2594-47-39 - P
4x T5 39W 150x1843





2594-57-39 - P
4x T5 39W 150x1843




2594-57-54 - P
4x54W 150x2443




2594-67-54 - P
4x54W 150x2443



2594-75-54 - P
2 x T5 54W
2x QR-111 MAX. 50W 150x1843





2594-76-54 - P
2 x T5 54W
2x QR-111 MAX. 50W 150x1843




2594-87-39 - P
4 x T5 39W
2x QR-111 MAX. 50W 150x2443




2594-37-39 - P
4 x T5 39W
2x QR-111 MAX. 50W 150x2443



2594-85-54 - P
2 x T5 54W
2x SPOT MAX. 50W 150x1843



2594-86-54 - P
2 x T5 54W
2x SPOT MAX. 50W 150x1843



FOCOS JACK
NO INCLUIDOS
(VER PAG. 23)

JACK SPOTS
NOT INCLUDED
(SEE PAG. 23)

2594-67-39 - P
4 x T5 39W
2x SPOT MAX. 50W 150x2443



2594-77-39 - P
4 x T5 39W
2x SPOT MAX. 50W 150x2443



PROFILE 140

CUSTOMIZABLE 








CHASIS SUPERFICIE Y SUSPENSIÓN
SURFACE AND SUSPENSION CHASSIS

- 2594-98-10 - P L: 911mm 
- 2594-98-11 - P L: 1211mm 
- 2594-98-12 - P L: 1511mm 
- 2594-98-13 - P L: 1811mm 
- 2594-98-14 - P L: 2411mm 








CHASIS EMPOTRABLES / RECESSED CHASSIS

- 2594-98-20 - P L: 911mm 
- 2594-98-21 - P L: 1211mm 
- 2594-98-22 - P L: 1511mm 
- 2594-98-23 - P L: 1811mm 
- 2594-98-26 - P L: 2411mm 



MÓDULOS DISTANCIADORES / SEPARATOR MODULES

- 2594-98-15 - P L: 140mm 
- 2594-98-16 - P L: 290mm 
- 2594-98-17 - P L: 440mm 
- 2594-98-18 - P L: 590mm 
- 2594-98-19 - P L: 740mm 



TAPA SUPERFICIE
SURFACE END CAP
L: 5mm

- 2594-98-30 - Q



UNIÓN 180° SUPERFICIE
SURFACE 180° JOINT
L: 5mm

- 2594-98-33 - Q



CODO 90° SUPERFICIE
SURFACE 90° CORNER
L: 200x200mm

- 2594-98-35 - Q



UNIÓN UNIVERSAL 140
UNIVERSAL JOINT 140

- 2594-98-37 - Q NO DIMMABLE
- 2594-98-38 - Q DIMMABLE



TAPA EMPOTRABLE
RECESSED END CAP
L: 23mm

- 2594-98-31 - Q



UNIÓN 180° EMPOTRABLE
RECESSED 180° JOINT
L: 5mm

- 2594-98-34 - Q



CODO 90° EMPOTRABLE
RECESSED 90° CORNER
L: 200x200mm

- 2594-98-36 - Q



SEPARADOR-BOTÓN
SEPARATOR-BUTTON

- 2594-98-32 - Q



CABLE DE SUSPENSIÓN
CABLE SUSPENSION

- 2594-99-37 - Q

PARA PROFILE 140 PEDIR POR PAREJAS
FOR PROFILE 140 ORDER IN PAIRS



ALIMENTACIÓN SUSPENSIÓN
SUSPENSION FEED CABLE
CABLE LONG: 2500 mm

- 2594-99-38 NO DIMMABLE

- 2594-99-40 DIMMABLE



ALIMENTACIÓN SUPERFICIE
SURFACE FEED CABLE

- 2594-99-41 NO DIMMABLE

- 2594-99-42 DIMMABLE



ALIMENTACIÓN EMPOTRABLE
RECESSED FEED CABLE

- 2594-99-43 NO DIMMABLE

- 2594-99-44 DIMMABLE



CONEXIÓN ELÉCTRICA
ELECTRIC CONNECTION

- 2594-99-47 NO DIMMABLE

- 2594-99-48 DIMMABLE



PROFILE 140 modules



MÓDULOS PARA FOCOS 12V
MODULES FOR 12V SPOTS

FOCOS JACK NO INCLUIDOS. VER PAG.23
JACK SPOTS NOT INCLUDED. SEE PAG.23





- 2594-98-01 - P L: 290mm  Máx. 1x35-50W
- 2594-98-02 - P L: 590mm  Máx. 1x35-50W





MÓDULOS PARA LÁMPARAS QR-111
MODULES FOR QR-111 LAMPS











- 2594-98-03 - P L: 290mm  Máx. 1x35-50W
- 2594-98-04 - P L: 590mm  Máx. 2x35-50W




MÓDULOS PARA LÁMPARAS DE DESCARGA
MODULES FOR DISCHARGE LAMPS









L: 1190mm  

- 2594-98-05 - P  70W  
- 2594-98-06 - P  150W
- 2594-98-07 - P  70W  
- 2594-98-08 - P  150W



MÓDULOS PARA LÁMPARAS T5
MODULES FOR T5 LAMPS



- 2594-98-24 NO DIMMABLE T5 2x24W  POLICARBONATO / POLYCARBONATE
- 2594-96-24 DIMMABLE L: 590mm
- 2594-98-25 NO DIMMABLE T5 2x24W  DIFUSOR / LOUVER
- 2594-96-25 DIMMABLE L: 590mm
- 2594-98-39 NO DIMMABLE T5 2x39W  POLICARBONATO / POLYCARBONATE
- 2594-96-39 DIMMABLE L: 890mm
- 2594-98-40 NO DIMMABLE T5 2x39W  DIFUSOR / LOUVER
- 2594-96-40 DIMMABLE L: 890mm
- 2594-98-54 NO DIMMABLE T5 2x54W  POLICARBONATO / POLYCARBONATE
- 2594-96-54 DIMMABLE L: 1190mm
- 2594-98-55 NO DIMMABLE T5 2x54W  DIFUSOR / LOUVER
- 2594-96-55 DIMMABLE L: 1190mm
- 2594-98-80 NO DIMMABLE T5 2x80W  POLICARBONATO / POLYCARBONATE
- 2594-96-80 DIMMABLE L: 1490mm
- 2594-98-81 NO DIMMABLE T5 2x80W  DIFUSOR / LOUVER
- 2594-96-81 DIMMABLE L: 1490mm